

## AC Fan

# 225mm

## A22580 AC 3ø

80mm thick



3-Phase



- Steel Impeller
- Weight : 2750 g
- Rohs Compliance

### General Specifications [一般特性]

Material	Aluminum Housing	[鋁合金框]
	Steel Impeller	[金屬葉片]
Bearings	Maintenance-Free Ball Bearings	[滾珠軸承]
Motor Type	Three-Phase AC Induction	[三相感應馬達]
Connection	Lead wire	[導線連接]
Dielectric Strength	1800 VAC for 1 Sec.	[耐壓規格]
Insulation Resistance	100 MΩ min.@500VDC	[絕緣阻抗]
Operating Temperature	-20°C to +70°C	[操作環溫]
Type of Protection	Insulation Class F	[線圈等級]
Ingress Protection	IP54 (optional IP56 rated)	[防塵防水]
Safety	Thermally Protected (Auto Restart)	[自動回復式溫度開關安全保護]

□ **225 x 80** mm ‹ High Speed ›  
〔高轉速〕


### Specifications [規格表]

Model No. [型號] (Three-Phase)	Voltage [電壓] V (V <sub>L-L</sub> )	Freq [頻率] Hz	Current [電流] A (I <sub>ph</sub> )	Power [功率] W (ΣP)	Speed [轉速] rpm	Pressure [靜壓] mmAq	Air Flow [風量] CFM	Noise [噪音] dB	Certification [安規認證] TUV UL CE
A22580-V2HBLS(3ø)	230	50/60	0.28/0.26	49/65	2800/3200	23.4/26.8	590/670	68/71	
A22580-V3HBLS(3ø)	380		0.18/0.16	56/70	2800/3200	23.4/26.8	590/670	68/71	
A22580-V3SBLS(3ø)	440		0.22/0.18	69/78	2850/3300	23.6/27.4	600/690	69/72	
A22580-V4HBLS(3ø)	480		0.08/0.09	43/60	2750/3100	23.0/25.8	580/650	67/70	

L (Lead Wire 導線連接)

\*Specifications are subject to change without notice

### Dimensions (Unit : mm)

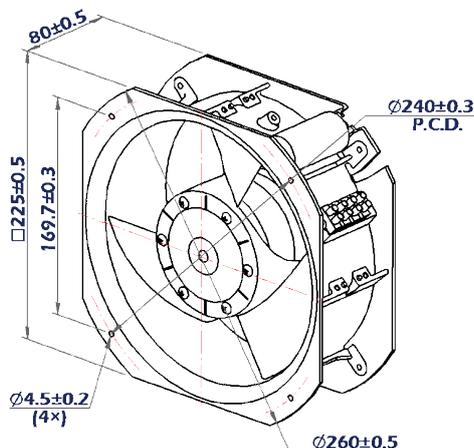

### Air Flow and Static Pressure

